

# Components

## COMPRESSION PLATE

Usually assembled above top row of blocks. The plate bolt is tightened to compress blocks around cables, while providing room for STG endpacking. Comes in GRP, glassfibre reinforced polyester.



## STAYPLATE

To be placed between each row of blocks. Stayplates simplify installation, increase stability and anchor blocks within the frame. Plates come in galvanized or stainless steel, and aluminium.

Stayplate



Stayplate 60




## LUBRICANT

30 g / 25 ml (0.07 pound / 0.85 oz)  
For easier installation and must be used with pressure-tight installation,



## STG-ENDPACKING

Installed between compression plate and the top of the frame, completing the seal. Made of Lycron with galvanized or stainless steel fittings.

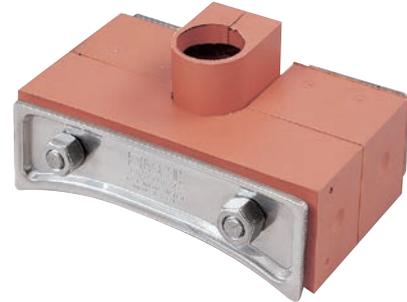


## PTG-PRESSWEDGE

May be placed anywhere in the frame. Made of Lycron, with stainless steel fittings. Must always be installed in combination with a stayplate.

PTG Hex

PTG Allen

PTG Allen 60

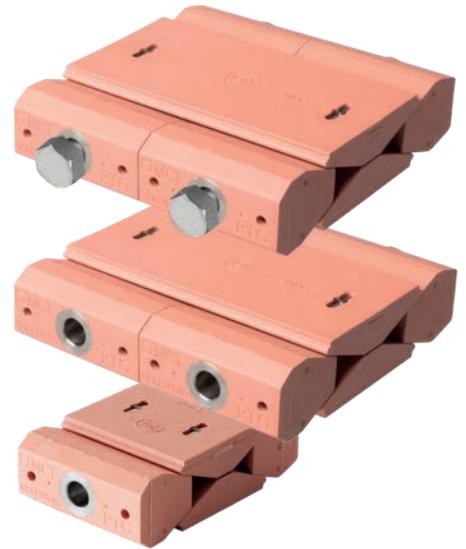

Component	Weight in kilograms	Weight in pounds
Compression Plate	0.24	0.53
STG	0.6	1.32
PTG 120 Hex and Allen	0.83	1.81
PTG 60 Hex and Allen	0.41	0.9
Stayplate	0.13	0.29
Stayplate 60	0.02	0.04