


# BENNING

World Class Power Solutions

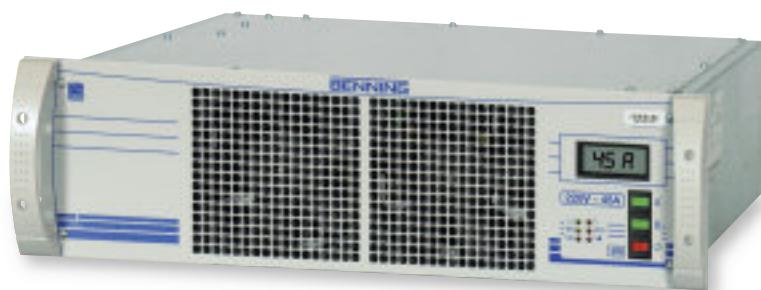

## Industrial

Modular DC Power Systems  
TEBECHOP 3000 I and 12000 I



# Modular DC Power Systems

## High Availability and Efficiency

### Modular DC Power Systems for Industrial Application

For several years BENNING has been supplying high quantities of modular DC power Systems for business critical infrastructure within the telecommunication and information industry. These modular DC power systems are often equipped with battery back-up to protect communication systems against mains disturbances or mains power failure.

The modular system design with parallel operating hot-plug DC power modules (plug and play) provides high availability, can be upgraded and is easy to install and to maintain.

BENNING has now developed a special range of industrial modular DC power systems to meet the specifications required in the industrial sectors, such as the petrochemical industry, the power distribution and power generation industry and the automation control industry.

These systems are available for DC output voltages 24 V, 48 V, 60 V, 110 V and 220 V.

The IU output characteristic of the DC modules (fig. 1) allows operation with or without batteries.

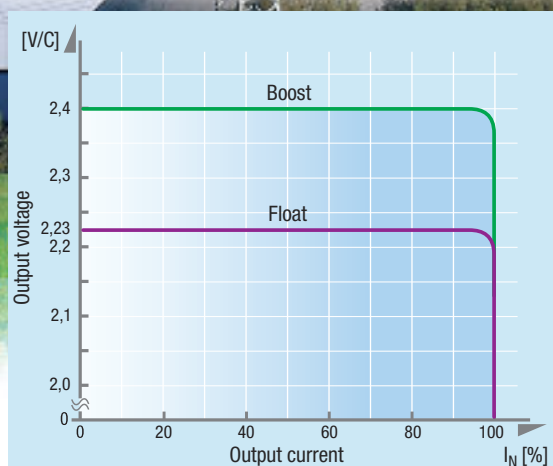


Fig. 1: IU-characteristic, DIN 41773 for lead acid batteries

### Modular DC systems offer flexible power scalability, high availability and excellent efficiency

Parallel operating DC power modules integrated into 19" rectifier shelves are the base of these systems.

The DC power modules are hot pluggable and allow easy output power scaling as well as n+1 redundancy.

Thanks to the compact and space saving design, only 3 Us are needed for the integration of the 19" rectifier shelves into system cabinets.

Fig. 4 shows the high efficiency level of the DC power modules with more than 90 % efficiency between 30 % and 100 % of the rated load, which contributes to lower energy costs during operation.



Fig. 2: 19" modular rectifier shelf with 4 modules  
TEBECHOP 3000 I and remote monitoring unit MCU 2500  
output voltage 110 V, output current 80 A



Fig. 3: 19" modular rectifier shelf with 5 modules  
TEBECHOP 3000 I  
output voltage 110 V, output current 100 A

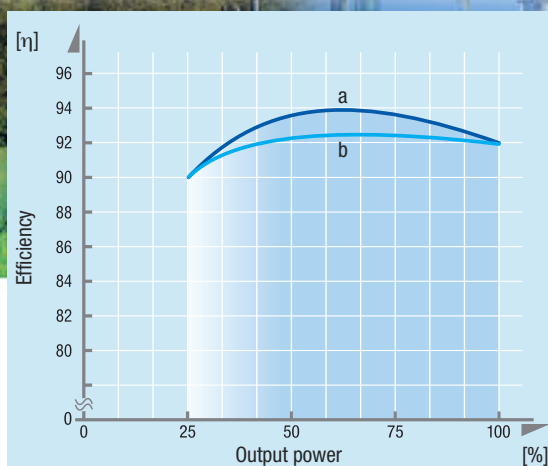


Fig. 4: Efficiency versus output power  
a) TEBECHOP 12000 I, b) TEBECHOP 3000 I

### 19" rectifier shelf with TEBECHOP 3000 I power modules

Fig. 2 shows one 19" rectifier shelf with built-in power modules TEBECHOP 3000 I. Each module is designed to supply max. 3000 W output power.

The 19" rectifier shelf can support from 1 up to 4 or 5 power modules and covers the output power range from 3000 W up to 15000 W.

If only 4 power modules are integrated, one slot of the shelf can be used for the monitoring and control unit MCU 2500 (fig. 2)

The MCU 2500 can also be integrated into the DC system cabinet, if the 19" rectifier shelf will be equipped with 5 power modules.

## 19" Rectifier Modules

### Compact, Variable, Energy Saving

#### 19" rectifier version TEBECHOP 12000 I (fig. 5)

The TEBECHOP 12000 I has a three phase rectifier design but in contrast to the TEBECHOP 3000 I, it consists of only one power module which can be built into a 19" rectifier shelf. The industrial version of the TEBECHOP 12000 I is available with DC voltages 48 V, 60 V, 110 V and 220 V.

The TEBECHOP 12000 I is a very powerfull rectifier which can supply 90 A at 110 V and 45 A at 220 V DC. It is the perfect choice for high power DC systems from 12 kW up to 120 kW.

System redundancy (n+1) can be realized by adding one additional rectifier.



Fig. 5: 19" modular rectifier TEBECHOP 12000 I  
output voltage 220 V, output current 45 A



Fig. 6: Modular rectifier system with  
4 modules TEBECHOP 12000 I,  
output voltage 220 V, output current 180 A

#### Advantages of the Industrial Modular DC Power Systems

- High power density with low volume and weight
- Unity power factor (0,99 at nominal load)
- DC modules with real hot-plug design
- High efficiency 90 % between 30 % and 100 % load
- DC output with excellent dynamic behaviour and low ripple
- Wide input voltage range
- Temperature compensated battery charging
- MCU 2500 for local and remote system status and alarm monitoring
- Remote monitoring with modem, HTML or SNMP adapter



## TEBECHOP 3000 I and 12000 I, High Power Density, Low Operating Losses

Fig. 7: 19" modular rectifier shelf with 4 modules TEBECHOP 3000 I  
and remote monitoring unit MCU 2500  
output voltage 110 V, output current 80 A

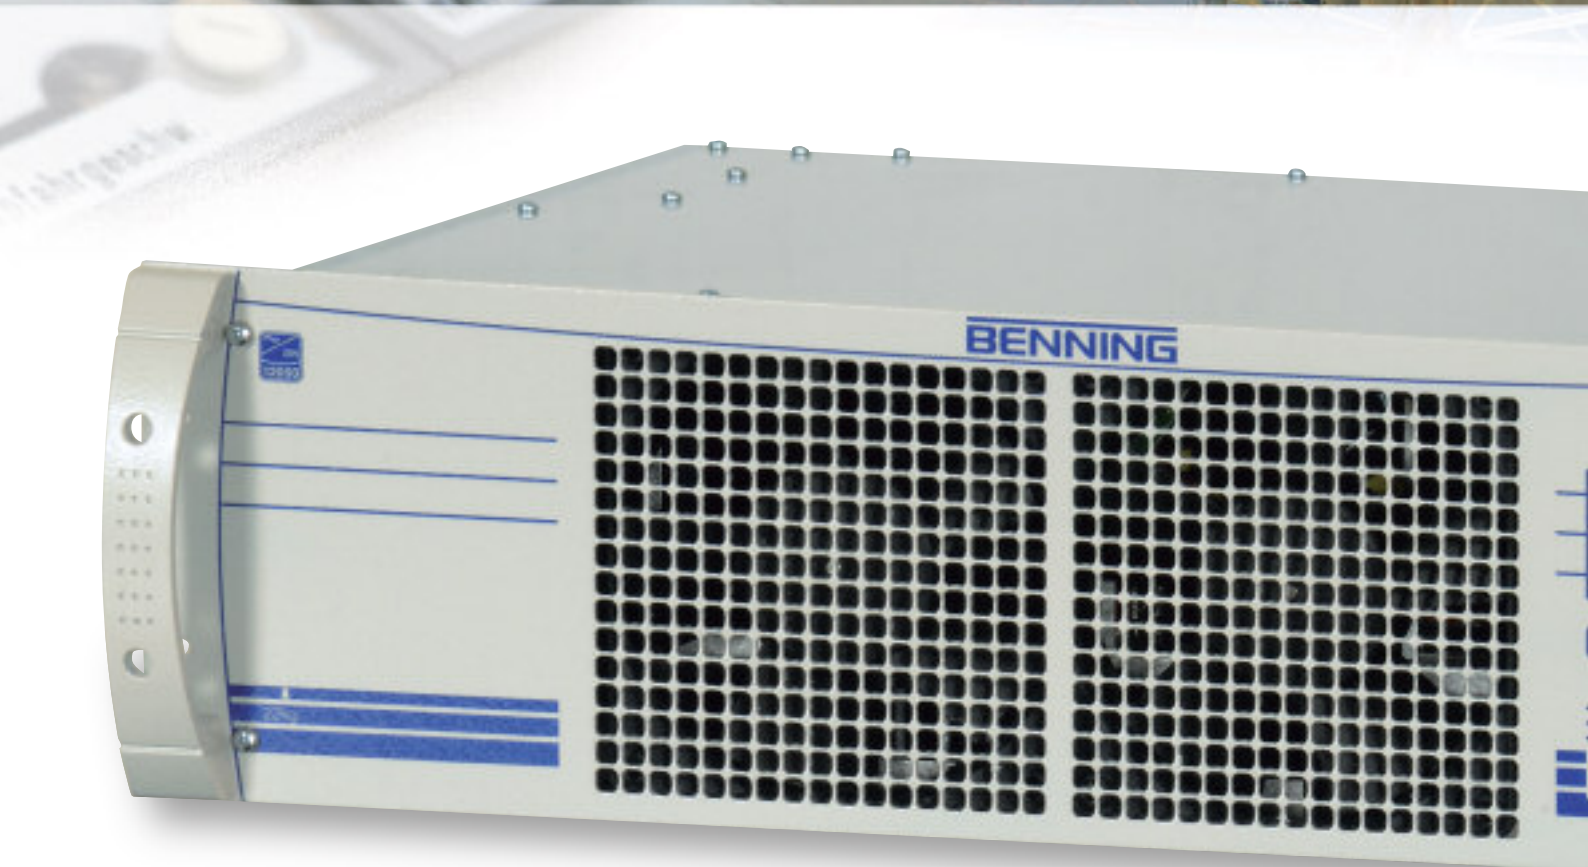
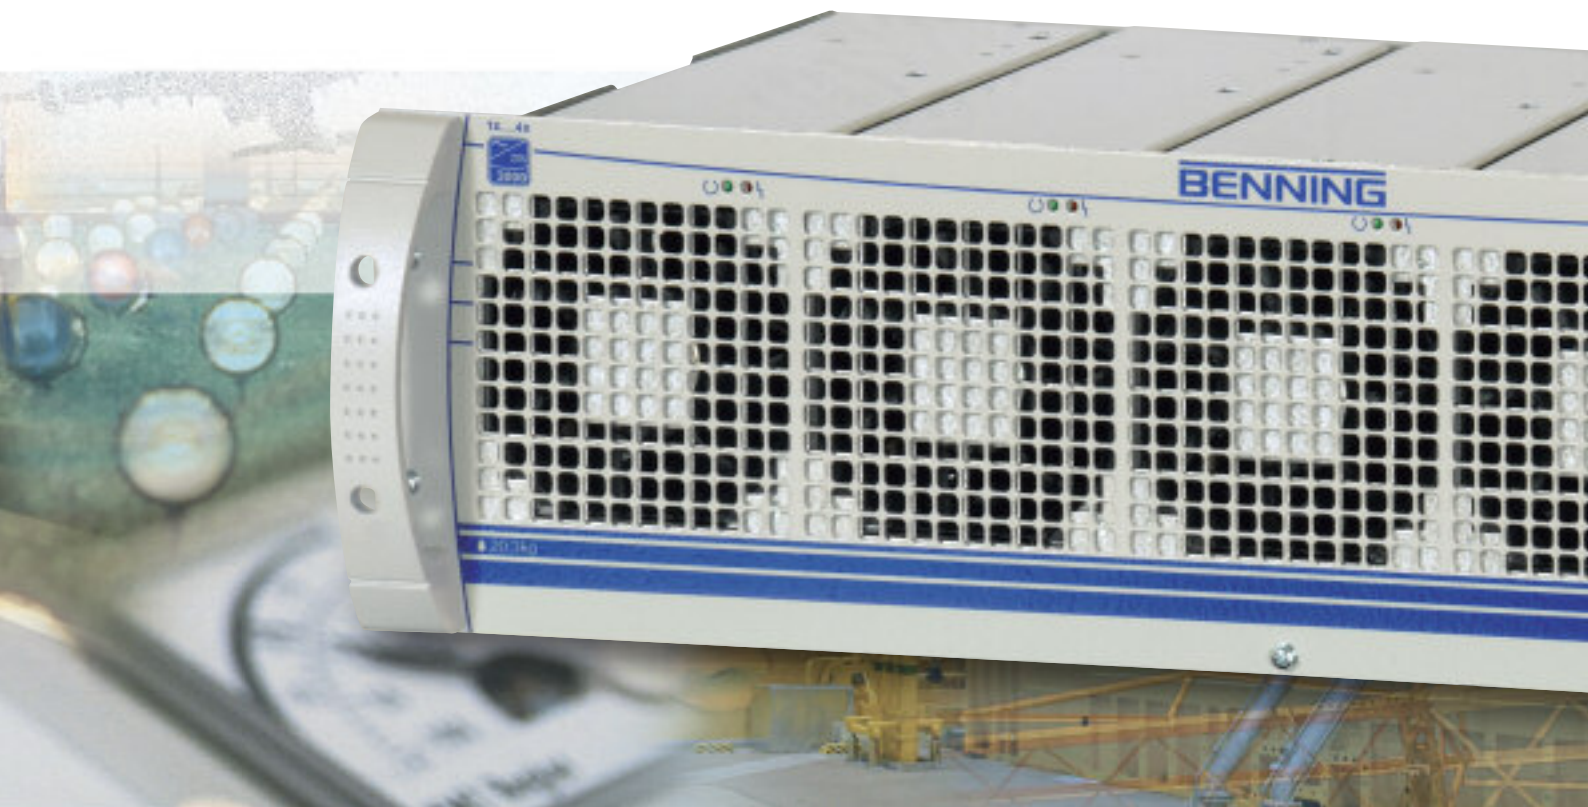


Fig. 8: 19" rectifier TEBECHOP 12000 I  
output voltage 220 V, output current 45 A

## Remote Monitoring Unit MCU 2500

### Broad Monitoring Capability

#### Remote monitoring and control unit MCU 2500

The microprocessor controlled MCU 2500 is designed for local and remote monitoring and control of modular DC power systems.

The MCU 2500 allows local monitoring via pushbuttons and LCD-display. PC-connection is possible using the built-in RS-232 interface.

Remote monitoring can be done with modem, Ethernet, web or SNMP.

The MCU 2500 design is extremely flexible and provides extended functionality and an increased number of measuring points to meet different customer specifications.


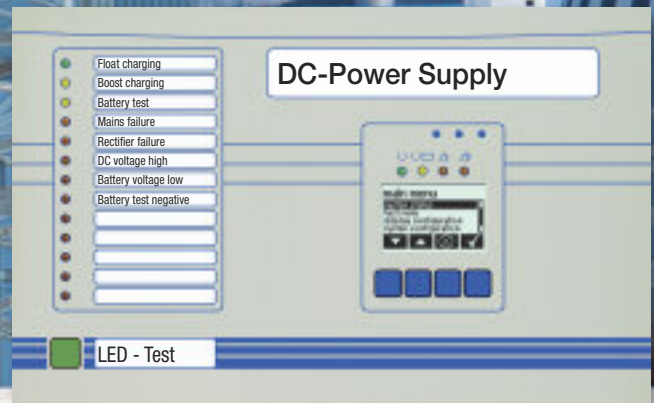


Fig. 9: Monitoring and control unit



Fig. 10: Monitoring concept of the MCU 2500

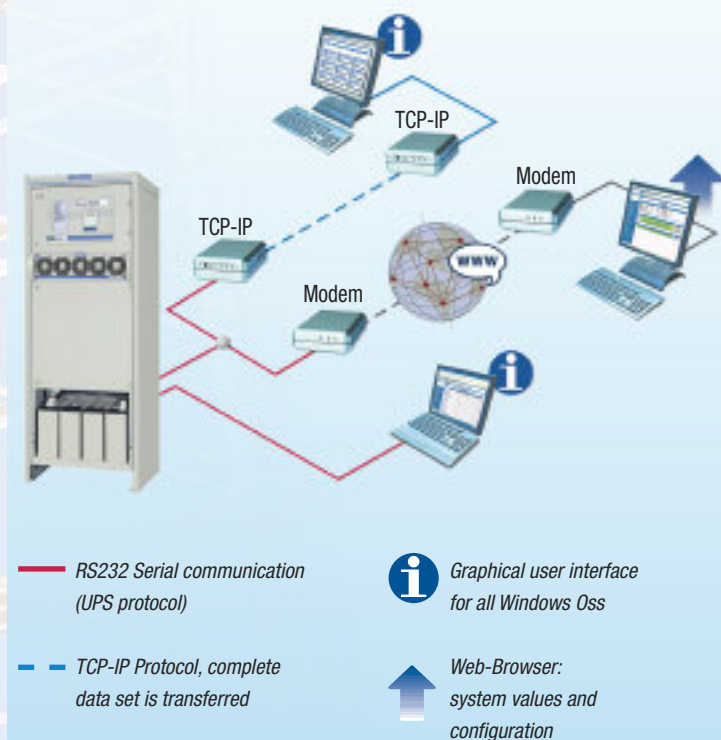

# Modular DC Power Systems

## A Flexible Range of Customised Solutions

### Two MCU 2500 versions are available:

#### 1. 19" Modul, height 3U, width 1/5 19"

This version can be integrated into the TEBECHOP 3000 I rectifier shelves.

#### 2. Cabinet version

The cabinet version consists of a base unit, measurement cards, digital and analog relay cards and front panel.

These components can be mounted into DC system cabinets.

### Modular DC Systems

BENNING's DC system cabinet range is very flexible and allows us to meet different customer specifications.

Besides wall and floor cabinets, cabinets for the integration of batteries are available.

BENNING also offers some new AC and DC distribution solutions, which makes it easier to adapt the distribution design to various customer requirements.



Examples of modular DC-power systems:

Fig. 11: output voltage 24 V,  
output current 210 A



Fig. 12: output voltage 220 V,  
output current 100 A



Fig. 13: same as Fig. 12, but with  
open frontdoor

Specifications

of Rectifier Modules

| Output power                 | [W]   | 3000 I                              | 6000 I | 9000 I | 12000 I | 15000 I | 12000 I       |
|------------------------------|-------|-------------------------------------|--------|--------|---------|---------|---------------|
| Number of modules            |       | 1                                   | 2      | 3      | 4       | 5       | 1             |
| Input voltage                | [V]   | 1 x 85 – 264*1 or 3 x 360 – 460 + N |        |        |         |         | 3 x 360 – 460 |
| Input current (at 1 x 230 V) | [A]   | 15                                  | 30     | 45     | 60      | 75      | 17*2          |
| Frequency                    | [Hz]  | 47 – 63                             |        |        |         |         |               |
| Power factor                 | [A]   | 0,99                                |        |        |         |         | 0,94          |
| Output current at            |       |                                     |        |        |         |         |               |
| 24 V                         | [A]   | 70                                  | 140    | 210    | 280     | –       | –             |
| 48 V                         | [A]   | 50                                  | 100    | 150    | 200     | 250     | 200           |
| 60 V                         | [A]   | 40                                  | 80     | 120    | 160     | 200     | 160           |
| 110 V                        | [A]   | 20                                  | 40     | 60     | 80      | 100     | 90            |
| 220 V                        | [A]   | 10                                  | 20     | 30     | 40      | 50      | 45            |
| Characteristic               |       | IU                                  |        |        |         |         |               |
| Output voltage               |       |                                     |        |        |         |         |               |
| Boost                        | [V/C] | 2,4 V/Cell                          |        |        |         |         |               |
| Float                        | [V/C] | 2,23 V/Cell                         |        |        |         |         |               |
| Output voltage stability     |       |                                     |        |        |         |         |               |
| Static                       | [V/C] | ± 1 (typical ± 0,5 %)               |        |        |         |         |               |
| Dynamic                      | [V/C] | ± 5 (load Δ 10 % - 90 % - 10 %)     |        |        |         |         |               |
| Response time                | [ms]  | < 2 (load Δ 10 % - 90 % - 10 %)     |        |        |         |         |               |
| Efficiency*3                 | [%]   | 92                                  |        |        |         |         | 94            |
| Ripple                       | [%]   | < 1                                 |        |        |         |         |               |
| Radio interference           |       | EN 55022 class B                    |        |        |         |         |               |
| Protection class             |       | 1, VDE 0804 and IEC 60950           |        |        |         |         |               |
| Protection                   |       | IP 20                               |        |        |         |         |               |
| Ambient temperature          | [°C]  | 0 – 50                              |        |        |         |         |               |
| Operating altitude           | [m]   | up to 2000 above sea level          |        |        |         |         |               |
| Moisture class               |       | F DIN 40040                         |        |        |         |         |               |
| Cooling                      |       | forced ventilation                  |        |        |         |         |               |
| Voltage/Current measurement  |       | LCD-display on the frontpanel*4     |        |        |         |         |               |
| Frontpanel indications (LED) |       |                                     |        |        |         |         |               |
| Mains                        |       | –                                   |        |        |         |         | yellow        |
| DC overvoltage               |       | –                                   |        |        |         |         | red           |
| Normal operation             |       | green                               |        |        |         |         | green         |
| Fault                        |       | red                                 |        |        |         |         | red           |
| Fuse alarm                   |       | –                                   |        |        |         |         | red           |
| Potential free common alarm  |       | existing                            |        |        |         |         | only with MCU |
| Dimensions 19" module        |       |                                     |        |        |         |         |               |
| Hight (front panel)          | [mm]  | 133                                 |        |        |         |         |               |
| Width (front panel)          | [mm]  | 483                                 |        |        |         |         |               |
| Depth                        | [mm]  | 400                                 |        |        |         |         | 430           |
| Weight                       | [kg]  | 14                                  | 17     | 20     | 23      | 26      | 22            |


\*1) Power decreasing at 205 V input voltage

\*2) at 400 V

\*3) Efficiency at 24 V approx. 1 % lower

\*4) only with MCU 2500

Specifications are subject to change without notice.

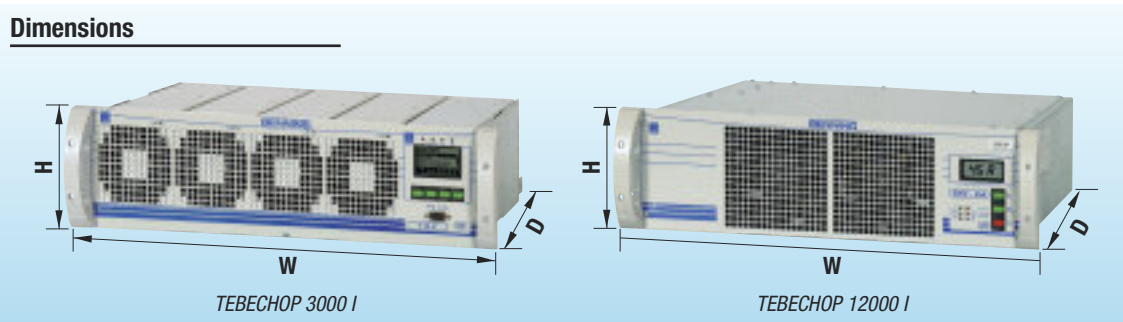


[www.benning.de](http://www.benning.de)

## BENNING worldwide

### Austria

Benning GmbH Elektrotechnik und Elektronik  
Eduard-Klinger-Str. 9  
A-3423 St. Andrä-Wördern  
Tel. 0 22 42 / 3 24 16-0  
Fax 0 22 42 / 3 24 23  
E-Mail: [info@benning.at](mailto:info@benning.at)

### Belarus

IOOO BENNING Belarus  
ul. Derzinskogo, 50  
BY-224030, Brest  
Tel. 0162 / 22 07 21  
Fax 0162 / 22 07 21  
E-Mail: [info@benning.brest.by](mailto:info@benning.brest.by)

### Belgium

Benning Belgium  
Power Electronics  
Z. 2 Essenestraat 16  
B-1740 Ternat  
Tel. 02 / 58 287 85  
Fax 02 / 58 287 69  
E-Mail: [info@benning.be](mailto:info@benning.be)

### Croatia

Benning Zagreb d.o.o.  
Trnjanska 61  
HR-10000 Zagreb  
Tel. 1 / 63 12 280  
Fax 1 / 63 12 289  
E-Mail: [info@benning.hr](mailto:info@benning.hr)

### Czech Republic

Benning CR s.r.o.  
Zahradní ul. 894  
CZ-293 06 Kosmonosy  
(Mladá Boleslav)  
Tel. 3 26 72 10 03  
Fax 3 26 72 25 33  
E-Mail: [benning@benning.cz](mailto:benning@benning.cz)

### France

Benning Conversion d'énergie  
43, avenue Winston Churchill  
B.P. 418  
F-27404 Louviers Cedex  
Tél. 0 / 2.32.25.23.94  
Fax 0 / 2.32.25.08.64  
E-Mail: [info@benning.fr](mailto:info@benning.fr)

### Germany

Benning  
Elektrotechnik und Elektronik  
GmbH & Co.KG  
Münsterstr. 135-137  
D-46397 Bocholt  
Tel. 0 28 71 / 93-0  
Fax 0 28 71 / 9 32 97  
E-Mail: [info@benning.de](mailto:info@benning.de)

### Great-Britain

Benning Power Electronics (UK) Ltd.  
Oakley House  
Hogwood Lane  
Finchampstead  
GB-Berkshire  
RG 40 4QW  
Tel. 0118 9731506  
Fax 0118 9731508  
E-Mail: [info@benninguk.com](mailto:info@benninguk.com)

### Hungary

Benning Kft.  
Power Electronics  
Rákóczi út 145  
H-2541 Lábatlan  
Tel. 033 / 50 76 00  
Fax 033 / 50 76 01  
E-Mail: [benning@vnet.hu](mailto:benning@vnet.hu)

### Italy

Benning Conversione di Energia S.r.l.  
Via 2 Giugno 1946, 8/B  
I-40033 Casalecchio di Reno (BO)  
Tel. 0 51 / 75 88 00  
Fax 0 51 / 61 67 655  
E-Mail: [info@benningitalia.com](mailto:info@benningitalia.com)

### Netherlands

Benning NL  
Power Electronics  
Peppelkade 42  
NL-3992 AK Houten  
Tel. 0 30 / 6 34 60 10  
Fax 0 30 / 6 34 60 20  
E-Mail: [info@benning.nl](mailto:info@benning.nl)

### Poland

Benning Power Electronics Sp.z.o.o.  
Korczunkowa 30  
PL-05-503 Głusków  
Tel. 0 22 / 7 57 84 53 / 7 57 36 68-70  
Fax 0 22 / 7 57 84 52  
E-Mail: [biuro@benning.biz](mailto:biuro@benning.biz)

### P. R. China

Benning Power Electronics (Beijing) Co., Ltd.  
Tongzhou Industrial Development Zone  
1-B BeiEr Street  
CN-101113 Beijing  
Tel. 010 61568588  
Fax 010 61506200  
E-Mail: [info@benning.cn](mailto:info@benning.cn)

### Russian Federation

000 Benning Power Electronics  
Scholkovskoye Chaussee, 5  
RF-105122 Moscow  
Tel. 4 95 / 9 67 68 50  
Fax 4 95 / 9 67 68 51  
E-Mail: [benning@benning.ru](mailto:benning@benning.ru)

### Slovakia

Benning Slovensko, s.r.o.  
Kukuríčná 17  
SK-83103 Bratislava  
Tel. 02 / 44459942  
Fax 02 / 44455005  
E-Mail: [benning@benning.sk](mailto:benning@benning.sk)

### South East Asia

Benning Power Electronics Pte Ltd  
85, Defu Lane 10  
#05-00  
SGP-Singapore 539218  
Tel. (65) 6844 3133  
Fax (65) 6844 3279  
E-Mail: [sales@benning.com.sg](mailto:sales@benning.com.sg)

### Sweden

Eldaco AB  
Box 990, Hovslagarev. 3B  
S-19129 Sollentuna  
Tel. 08 / 6239500  
Fax 08 / 969772  
E-Mail: [power@eldaco.se](mailto:power@eldaco.se)

### Switzerland

Benning Power Electronics GmbH  
Industriestrasse 6  
CH-8305 Dietlikon  
Tel. 044 / 8057575  
Fax 044 / 8057580  
E-Mail: [info@benning.ch](mailto:info@benning.ch)

### Spain

Benning Conversión de Energía S.A.  
C/Pico de Santa Catalina 2  
Pol. Ind. Los Linares  
E-28970 Humanes, Madrid  
Tel. 91 / 6048110  
Fax 91 / 6048402  
E-Mail: [benning@benning.es](mailto:benning@benning.es)

### Ukraine

Benning Power Electronics  
3 Sim'yi Sosninykh str.  
UA-03148 Kyiv  
Tel. 044 / 501 40 45  
Fax 044 / 273 57 49  
E-Mail: [info@benning.ua](mailto:info@benning.ua)

### U.S.A.

Benning Power Electronics, Inc.  
11120 Grader Street  
USA-Dallas, TX 75238  
Tel. 214 5531444  
Fax 214 5531355  
E-Mail: [sales@benning.us](mailto:sales@benning.us)

# BENNING