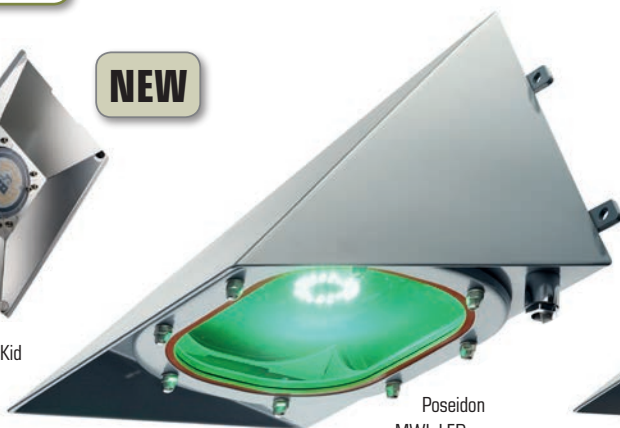



NEW


PoseidonLED Kid


Poseidon
MWL LED green

Poseidon
MWL LED white

Technical Data

| Name & Nr. | Watt | kg | Beschreibung |
|--------------------------------|------|------|--|
| Poseidon MWL831 LED weiß | 13W | 4,40 | <ul style="list-style-type: none"> • IP 56 • casing, glass-holding frame, latches and brackets made out of stainless steel • casing powdercoated (RAL 7001), clear hard glass pane, resistant against temperature changes • radar optimized • optional cable glands acc. VG, DIN 89280 (max. IP56) or with CVKS cable glands (IP68) • special wall mounting design for walls with 15° incline, also available with 0° and 10° • light colour: 4000K • 1 x AC LED module, white • approx. 1.600 lm • LED modules available for 230V and 110V AC (other voltage on request) • ambient temperature: -20°C to +40°C |
| Poseidon MWL831 LED grün | 13W | 4,40 | <ul style="list-style-type: none"> • as MWL831 LED white • 1 x AC LED module, green (other colours on request) |
| Poseidon LED Kit | 13W | 0,90 | <ul style="list-style-type: none"> • change kit from Poseidon MWL831 to Poseidon MWL831 LED: exchange in used lights without changing possible • consisting of: LED module, fitting panel, reflector and mounting material • LED Kit available for 230V und 110V (other voltage on request) |

Spare Parts on request

